



Short Description



- Remote display with large digits display, suitable for wall mounting
- 6-digit semi-alphanumeric red LED display (90 mm height)
- 4 indicator LEDs
- Aluminium profile case
- IP30 Ingress Protection rating
- Serial ports for transmission protocol
- Configuration from PC via RS232 serial port
- 15 programmable addresses
- Connectors, power supply (cable length: 1.2 m) and brackets for wall mounting included

Available Models

Model	Full Article Description	Article Number
Display RD-1	TS Display RD-1 12VDC	80033000

Technical Features RD-1

Power Supply	12 VDC; 1.5A (230VAC to 12VDC power supply adapter included)
Serial Ports	RS-232, RS-485
Baud Rate	9600 (bit/s)
Operating Temperature	-10°C ~ +50°C
Storage Temperature	-10°C ~ +60°C
Relative Humidity	80% (condensate free)

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.




Top Sensors RD-1 Remote Display




Dimensions in mm


Front View

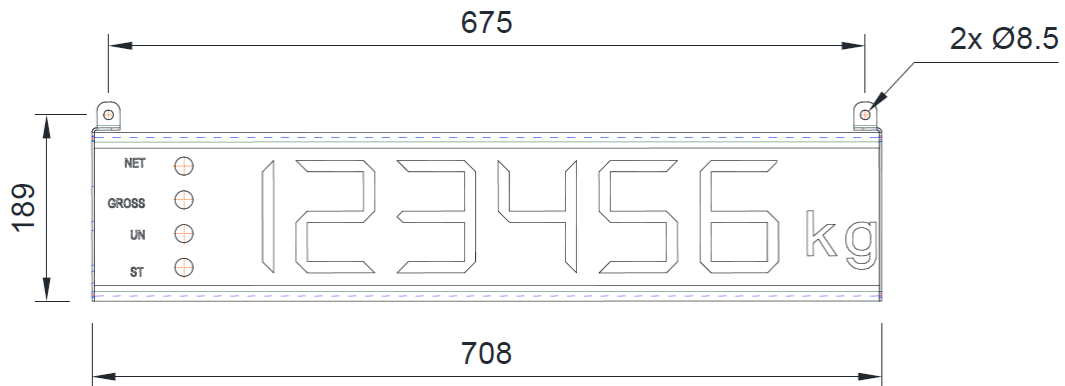

Top View

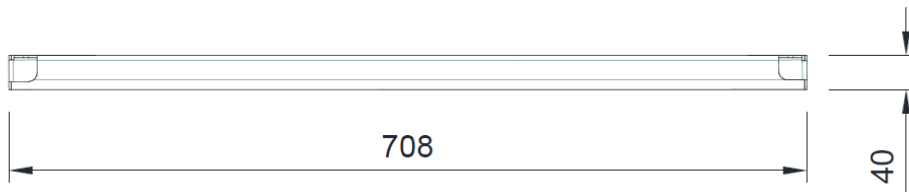

Side View

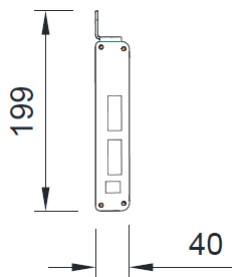

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

